



SANICONDENS® Pro pumps condensate away from condensing boilers and air conditioners. Small, this powerful pumping unit can be floor or wall mounted.





SANICONDENS® Pro

SANICONDENS® Pro comes with an auxiliary external overflow switch that will shut down the appliance or alert the consumer in the event of pump overflow.

Delivered with a complete installation kit

Possible connections	gas boilers , refrigerated display and air conditioner
Discharge Ø	8 mm
Tank size	2 L
Maximum flow rate	342 L/h
Maximum admissible waste water temperature	80°C - S3 15 % (1 min 30 on / 8 min 30 off)
Electrical power supply	220-240 V / 50-60 Hz
Motor power rating	60 W
Maximum current input	0,52 A
Electrical classification	I
Index of protection	IP 20
Weight	2 kg
Sound level	< 45 dB(A)
Waste pipe diameter	2x Ø 28 mm
Discharge pipework	8/11 mm
Supplied with	wall mount brackets, inlet adapter, discharge adapter (Ø 50 mm), 6 m of flexible discharge pipe, 2 m power cord, prewired to an alarm

VERTICAL AND HORIZONTAL DISCHARGE:
 ↑ 4,5 m → 50 m

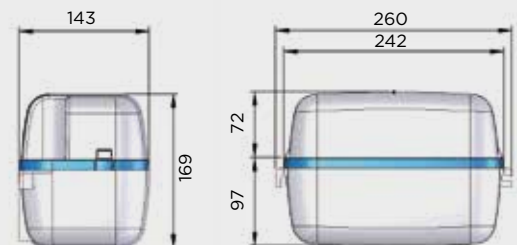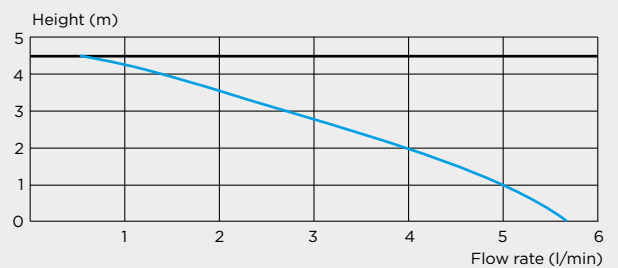

BENEFITS

- 2 inlets with one shut-off
- Prewired for possible alarm connection
- The volume of the tank prevents the pump from starting too frequently
- 2 L tank
- Compact
- Easy mounting with dual direction (vertical and horizontal) mountings